



PREMIER NARROW STRIP HEATER SPECIFICATION


Premier narrow strip heater fixtures are UL listed with mark prominently displayed. Supplied in a stainless steel shroud, a UL/NSF/ANSI finish is typically made to match the food guard.

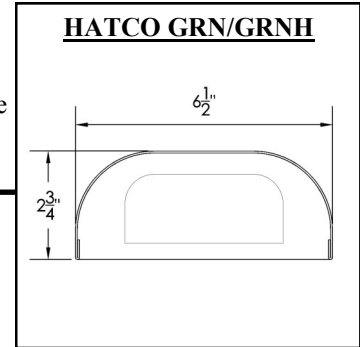

GENERAL WIRING GUIDELINES

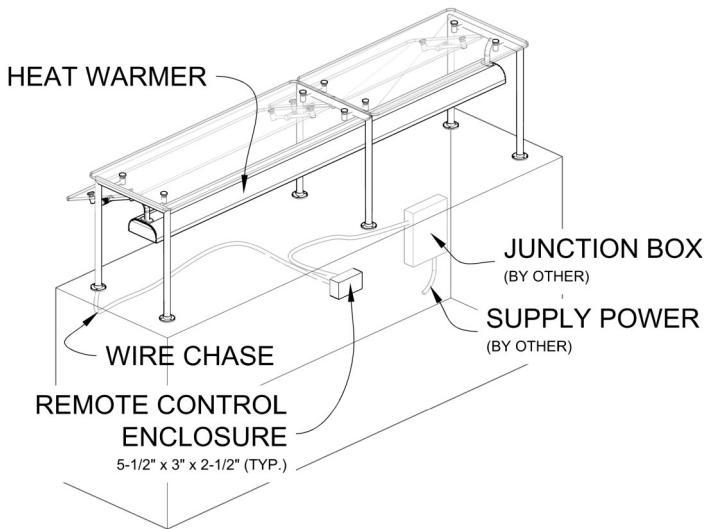

SCHEMATIC

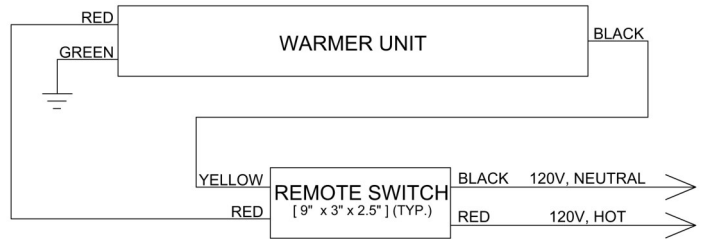

ADDITIONAL WARMER SPECIFICATIONS (GRNH)

Fixture Length	Model	Weight (lb.)	Wattage	Amps (@ 120V)
18"	GRNH-18	6	350	2.9
24"	GRNH-24	7	500	4.2
30"	GRNH-30	8	660	5.5
36"	GRNH-36	9	800	7.3
42"	GRNH-42	10	950	7.9
48"	GRNH-48	11	1100	9.2
54"	GRNH-54	13	1250	10.4
60"	GRNH-60	14	1400	11.7
66"	GRNH-66*	16	1560	13
72"	GRNH-72*	17	1725	14.4

* UNIT COMES WITH TOGGLE SWITCH ONLY

Specifications for reference only and may be changed without notice. All orders require approved shop drawings prior to release to production. Products are drawn & built to meet NSF Standard 2. It is the responsibility of the customer to ensure product meets local health board standards.

Web: www.pmg-inc.com
 Email: info@pmg-inc.com
 Phone: 1-800-251-5800
 Fax: 1-800-251-2515



Printed in the USA (01/2016)
 Premier Metal & Glass Ventures, Inc.
 1835 MacArthur Blvd., NW
 Atlanta, Ga 30318